




Duplex filters are used in hydraulic systems for separating solid materials from the hydraulic fluids and lubricating oils. They are intended for installation into piping. The filter element can be changed without any operational interruption.

Your product advantages: 40 FLD

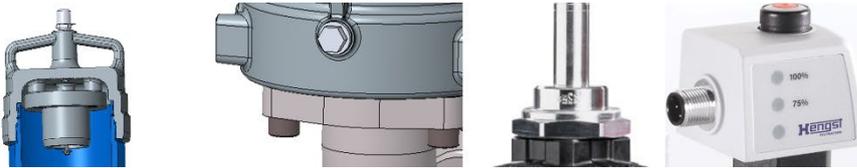

- Element change possible without tools
- Filter element change possible from above
- Optical maintenance indicator
- Drain plug
- Bypass valve at the highest position of the filter cover (no gas / air accumulation)
- Various optional connection variants (position and flange pattern)